


Installing the shutter panel brackets



The brackets simply slide into the window, between the glass and the rubber seal.

Insert two brackets at the top and two at the bottom of the window panel, they fit between the glass and the black rubber seal.

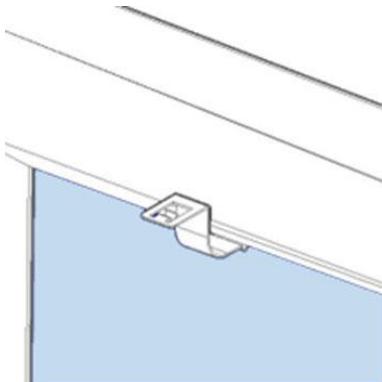


To correctly locate the bracket position, take a standard sized debit or credit card and hold it, sidewise, in the corner of the glass.

This is where your bracket fits and will line up with the fitting slot in the shutter panel.



Slide the bracket into place so that it's lined up with the edge of the card. Do the same on each side, top and bottom.

If it is very stiff, apply a smear of washing up liquid to the bracket and it will slide in more easily.

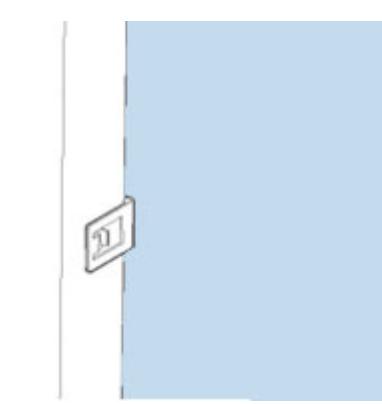


Taller shutters may be fitted with a 'midrail' to increase the shutter panel's stability.


If your shutter has a midrail then there will be 4 extra brackets provided, which you should fit into the side frames of the window.

2 holes will be added to each of the shutter's side frames, located above and below the midrail on each side, for these brackets.

Installing the Shutter Panel

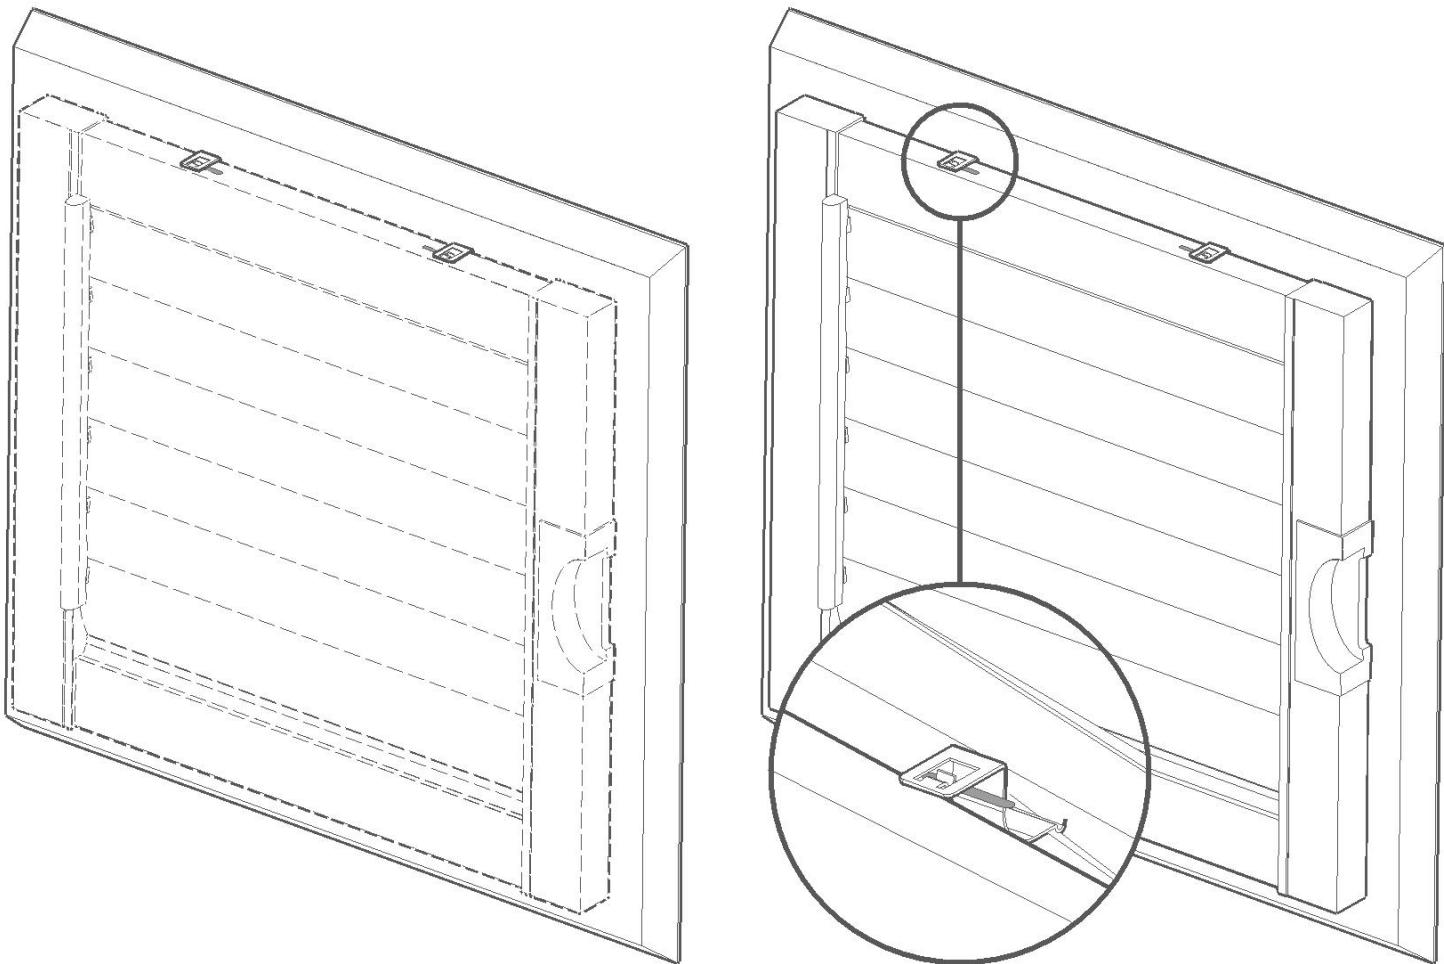


Line up the notches in the top and bottom frames of the Shutter with the brackets, and push the Shutter back against the window until it slots into place – you will hear a click as it connects..



Top Tip

The cutout part on the side frame of the Shutter is on the side facing the window handle, if applicable.

Removing the shutter panel from the window

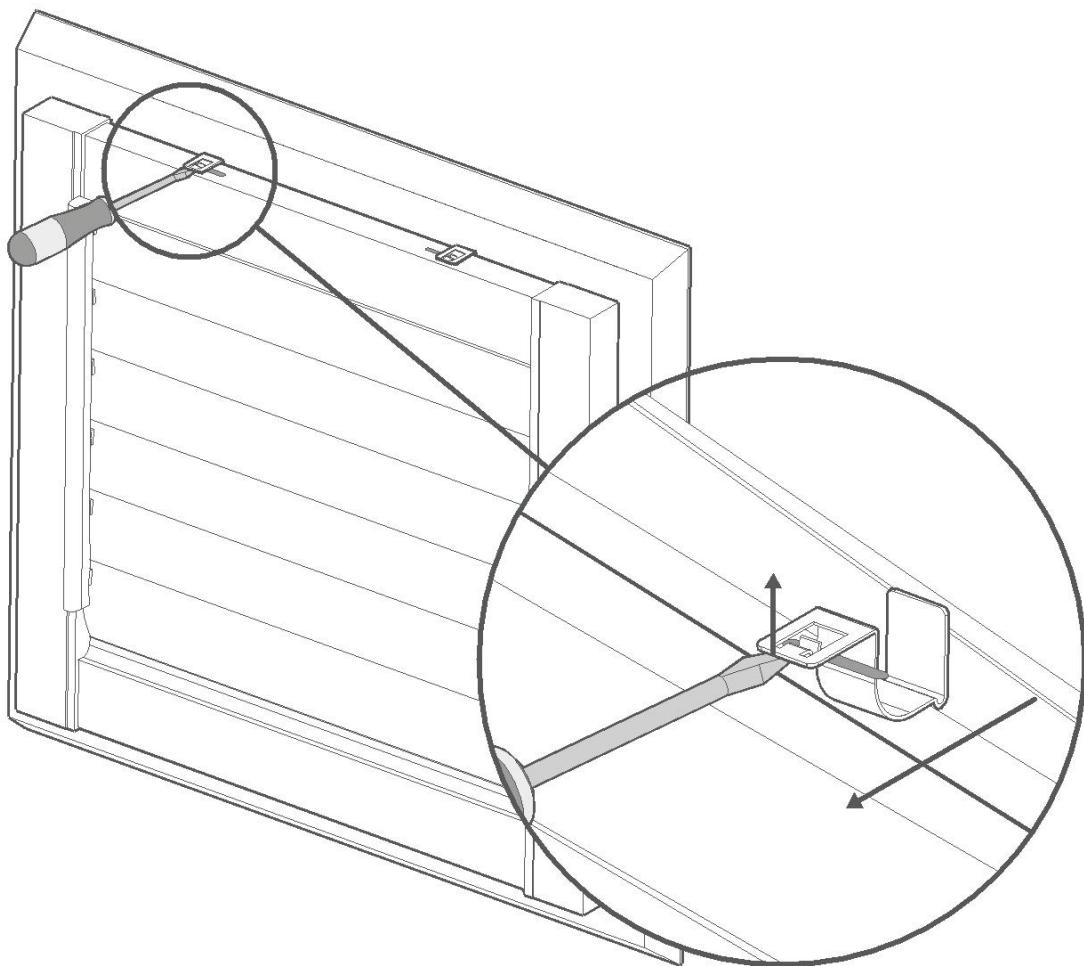

If at any point you need to remove the shutter from the window, for example to clean your windows, then it's easy; just use a flat head screwdriver or another slim, blunt object to gently pry the brackets free of where they clip into the shutter.

Loosen the brackets at the top, then at the sides (if you have a taller shutter with side brackets), then tilt the top of the shutter toward you and lift away from the window.